



Experience a safer
and more open world



ELECTROMAGNETIC DOOR HOLDER/RELEASES

Designed for remote door
release applications


Schematics

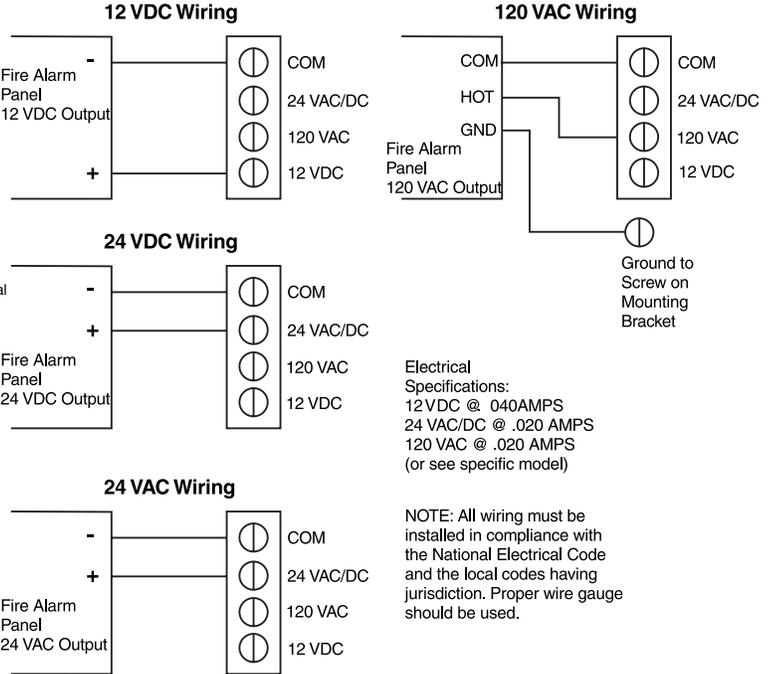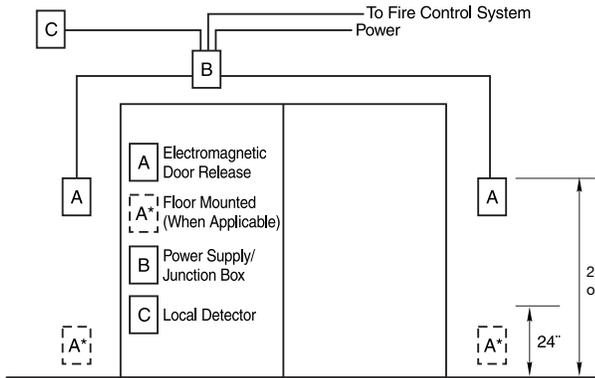

Operation Narrative


Doors are to be normally held open. The electromagnetic door releases will be energized with the voltage shown (at right) in the hardware set for this opening. Power shall be controlled by the fire control system. It will interrupt the power if alarmed, causing the doors to be released, thus allowing the door closers to close the doors. When power is restored the magnets will re-energize, permitting the doors to be manually returned to their held open position.

Accessories




1-1/2" (38mm) Extension (for use only with Models 997M, 998M & 994M) Mounts behind wall cover.


XK996M
Part# 996631M-*



Base Unit Armature Extension Mounts between armature and contact plate. Part# 900
Cannot be used with model 994M



Armature Extension 90° Bend Part# 900-Z
Must be used with 900 base unit. Those two pieces will extend armature 3" longer than the contact plate.



994M Swivel Armature (cannot be used with extension spacers)
Part# 900-3

*specify finish



ASSA ABLOY

Experience a safer and more open world

Spacer lengths – must be used with 900 base

