


# Securitron® M62 Magnalock®

1,200 lbs holding force  
direct mounted Magnalock

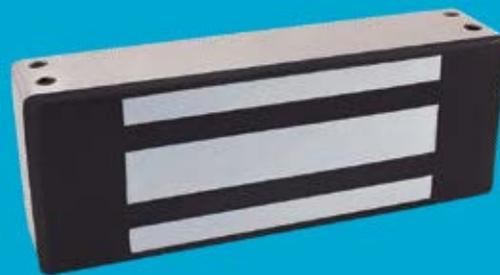

## The ultimate in Magnalock versatility for indoor/outdoor higher security.

The M62 is a strong, easy-to-maintain solution for interior, perimeter and exterior access control. With unsurpassed durability, the M62 will last long after most buildings wear out. Flexible mounting options support applications for hollow metal, concrete filled metal, wood, or glass with aluminum frames, and Herculite doors. Options include single and double door configurations, or specialty applications such as gates and fences.

## Features

### Standard Features

- PoE friendly
- Sustainability documentation
- Efficient, low power usage
- Automatic dual-voltage—no field adjustment required
- Fully sealed for weatherproof operations
- Size optimized for use with door closers
- Rust resistant—all ferrous metal surfaces plated for durability
- Instant release circuit—no residual magnetism
- Noise suppression with included MOV
- 10 ft [3.05m] of jacketed, stranded conductor cable
- Ultra-secure collapsing blind nuts mount to door frame for strength and reliability
- MagnaCare® lifetime replacement, no fault, no questions asked warranty

### Optional Features

- **F** Face drilled
- **G** Gate conduit
- **B** Patented BondSTAT magnetic bond sensor
- **D** Integrated Door Position Switch (DPS)
- **SS** Split Strike
- **SASM** Shock Absorbing Strike Mount for Gates
- **OS** Offset Strike



Grade 2



MagnaCare  
Warranty



Auto Sensing  
Dual Voltage  
12/24



PoE  
Friendly



Fire Rated




Outdoor  
Rated



Preload

## Dimensions

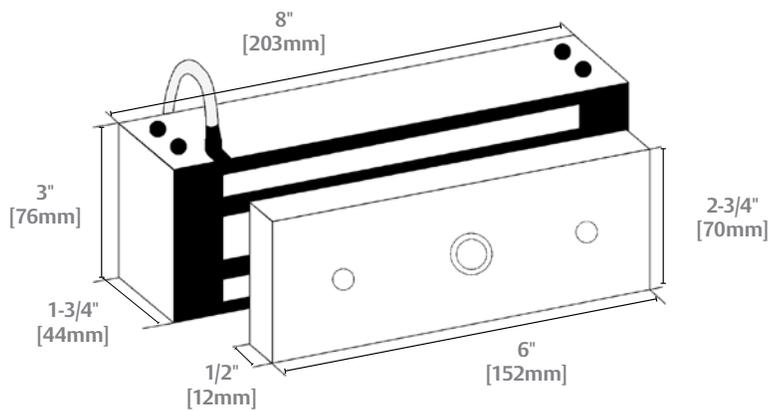

## Specifications

### Certifications

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA A156.23, Grade 2; E08501-1000
- CSFM—California State Fire Marshal Approved
- CE:EN 50081-1(92), EN 61000-6-2(99) Approved
- Environmental Product Declaration
- Health Product Declaration

### Dimensions

- **Magnalock:** 8"L x 1-3/4"D x 3"H
- **Strike:** 6"L x 1/2"D x 2-3/4"H

### Electrical

- 250 mA @ 12 VDC
- 150 mA @ 24 VDC

### Holding Force

- 1,200 lbs. [544kg]

### Operating Temperature

- -40 to +140F [-40 to +60C]
- Indoor or Outdoor use

### Shipping Weight

- 11 lbs [5kg]

## How to Order

Model Series	Mounting Method	Monitoring Options	Strike Plate Options
<b>M62</b>	<b>FG</b>	<b>BD</b>	<b>- OS</b>
<b>M62</b> 1,200 lbs	<b>(blank)</b> Direct Mount	<b>(blank)</b> No Monitoring	<b>(blank)</b> Standard Strike
	<b>F</b> Face Drilled	<b>B</b> BondStat Monitor	<b>OS</b> Offset Strike
	<b>G</b> Gate Conduit (M62/M82 only)	<b>D</b> Door Position Switch	<b>SS</b> Split Strike
		<b>BD</b> BondStat and DPS	<b>SASM</b> Shock Absorbing Strike Mount